






# THE KING OF TWEETERS








## LL2-C120 Air motion tweeter



Sensitivity (2.83V / 1M):	94dB
Frequency range:	1500-30000Hz
Impedance:	6.4 ohm
Resonance frequency:	1200Hz
Lowest crossover frequency:	1500Hz
Power handling:	300W
Effective diaphragm area	14cm <sup>2</sup>
Magnet type	Neodymium
Weight	0.51Kg

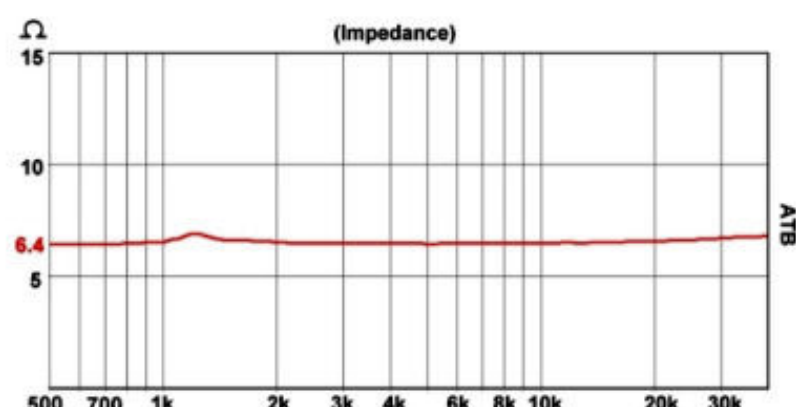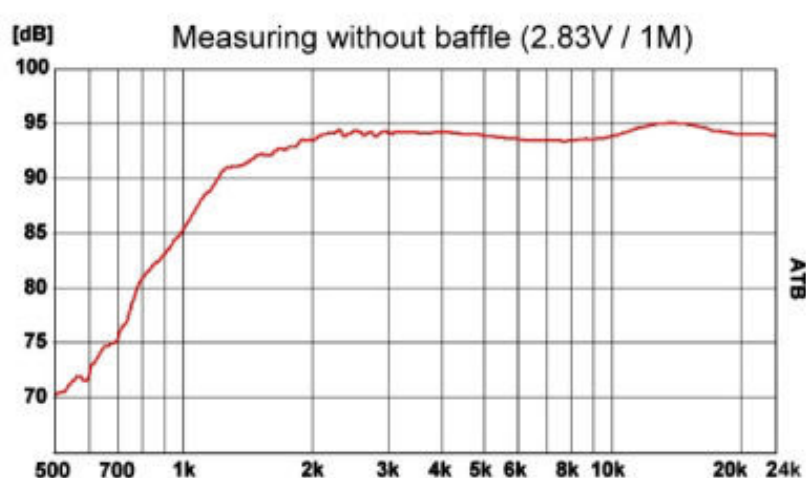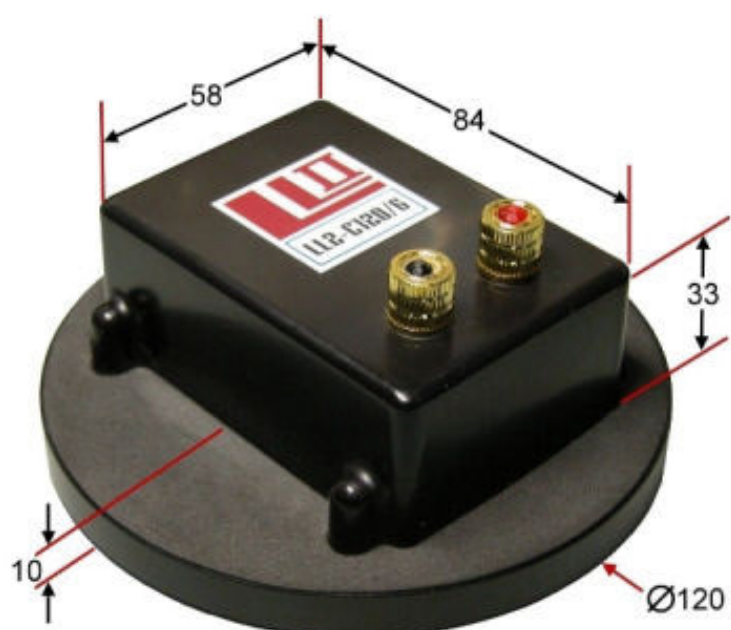

### Reference applications for LL2-C120

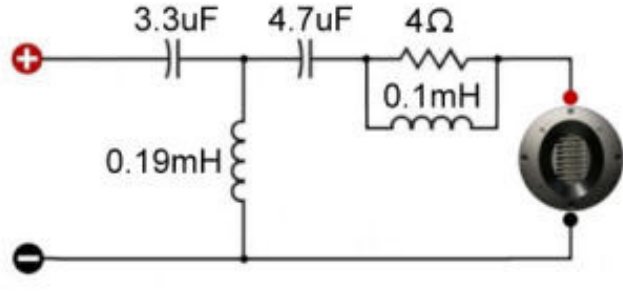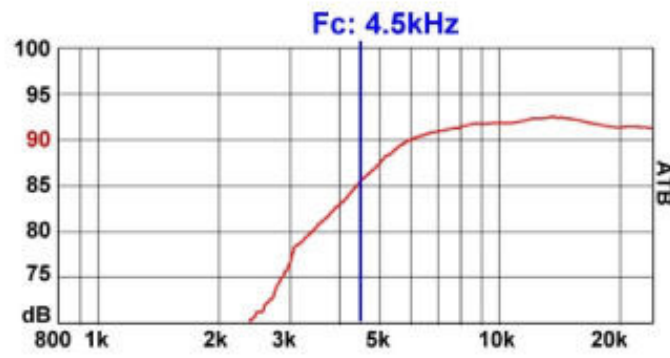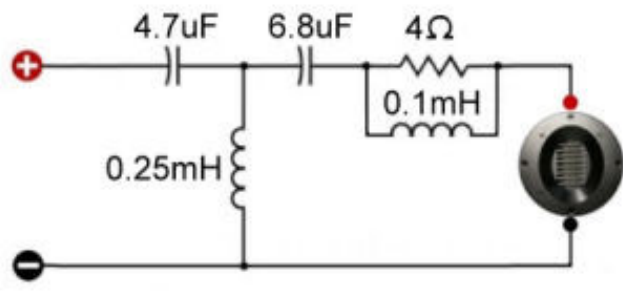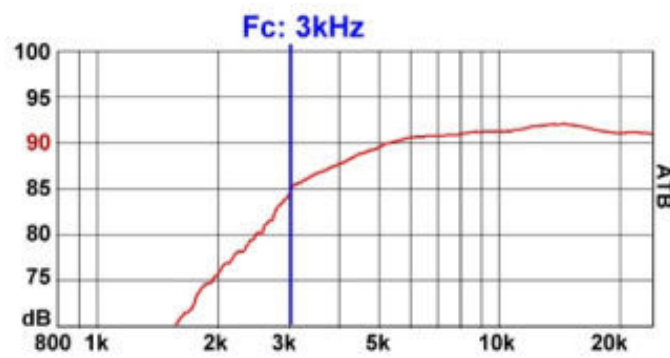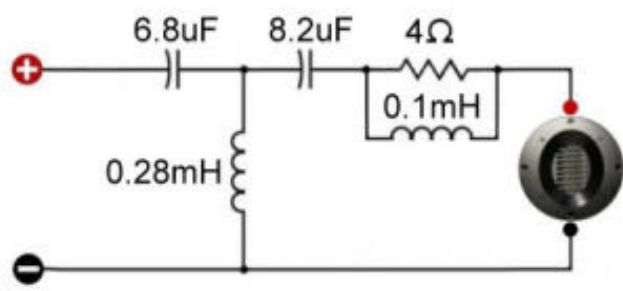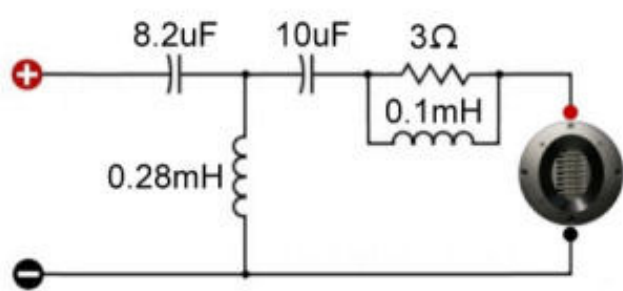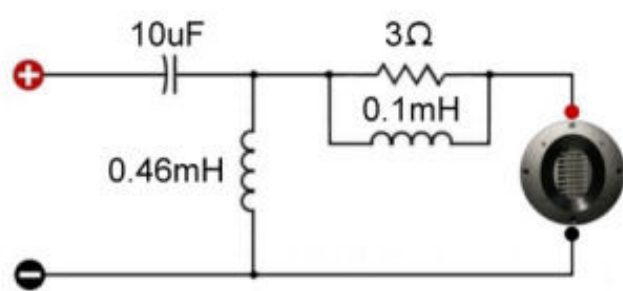

The inductors used in the applications above are at AWG 20#. The microphone is placed at 1M on axis, the tweeter is flush-mounted on a baffle, measured under free field conditions with 2.83V power input.

Made in Hong Kong

Designed by L.C.Y.